


JETT *Dub Jett*

Model Engines and Accessories

Jett Engines - Dimensional Reference

Dimensional Specifications For Jett Engines

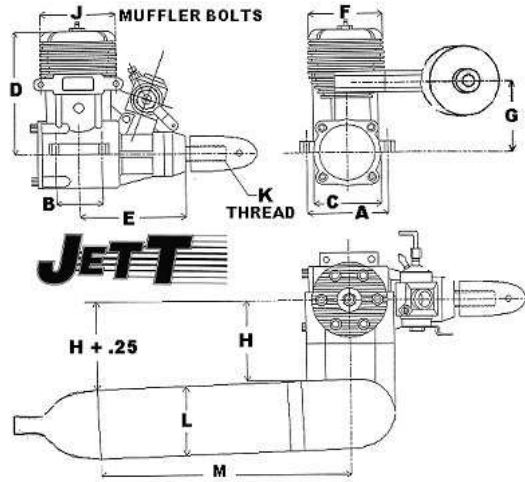

ALL DIMENSIONS ARE IN INCHES
 ALL WEIGHTS ARE IN OUNCES
 (25.4mm = 1" - 28.35gm=1 ounce)

SPORT-JETT ENGINES

(ALSO INCLUDES APPLICABLE STUNT, FF AND CL)

TYPE	DISP	BORE	STROKE	WT*	RPM RANGE	A	B	C	D	E	F	G	H	J	K	L	M
BSE25	.255	.709	.644	13.4	2000-20000	1.50	.590	1.22	2.10	2.156	1.61	1.27	1.57	1.378	1/4-28	1.375	5.3
BSE30	.297	.766	.644	13.0	2000-20000	1.50	.590	1.22	2.10	2.156	1.61	1.27	1.57	1.378	1/4-28	1.375	5.3
BSE35	.355	.787	.730	13.8	2000-20000	1.50	.590	1.22	2.10	2.156	1.61	1.27	1.57	1.378	1/4-28	1.375	5.3
QJ40	.398	.846	.708	16.0	18000+	1.62	.590	1.38	2.50	2.35	1.63	1.38	1.50	1.50	1/4-28	1.63	4.8
SS40	.398	.846	.708	17.0	3000-20000	1.73	.689	1.38	2.50	2.35	1.63	1.38	1.50	1.50	1/4-28	1.63	5.8
QM40	.398	.846	.708	16.0	22000+	1.62	.590	1.38	2.50	2.35	1.63	1.38	1.50	1.50	1/4-28	1.63	4.8
SJ40	.398	.846	.708	17.4	2000-18000	1.73	.689	1.38	2.50	2.45	1.63	1.38	1.58	1.50	1/4-28	1.50	6.2
SJ46	.457	.880	.752	17.2	2000-18000	1.73	.689	1.38	2.53	2.45	1.63	1.38	1.58	1.50	1/4-28	1.50	6.2
SJ50	.498	.900	.783	16.4	2000-18000	1.73	.689	1.38	2.55	2.45	1.63	1.38	1.58	1.50	1/4-28	1.50	6.2
SJ60L	.595	.940	.865	17.0	2000-16000	1.73	.689	1.42	2.60	2.45	1.63	1.38	1.58	1.50	1/4-28	1.50	6.5
SJ65	.654	.968	.890	25.6	1800-16000	2.05	.984	1.72	3.15	2.63	1.88	1.78	1.94	1.86	5/16-24	1.75	7.0
SJ76	.754	1.039	.890	25.4	1800-16000	2.05	.984	1.72	3.15	2.63	1.88	1.78	1.94	1.86	5/16-24	1.75	7.0
SJ90L	.900	1.093	.960	25.2	1700-16000	2.05	.984	1.72	3.19	2.63	1.88	1.78	1.94	1.86	5/16-24	1.75	7.0
SJ90T	.900	1.093	.960	25.8	1700-14000	2.05	.984	1.72	3.19	2.63	1.88	1.78	1.94	1.86	5/16-24	1.75	8.5
SJ105	1.073	1.125	1.080	29.9	1500-12000	2.05	.984	1.75	3.38	3.00	2.00	1.81	2.09	1.86	5/16-24	1.75	8.5
SJ120	1.197	1.188	1.080	31.5	1500-12000	2.05	.984	1.75	3.38	3.00	2.00	1.81	2.09	1.86	5/16-24	1.75	8.5

*ALL WEIGHTS ARE IN OUNCES AND INCLUDE MUFFLER AND SPINNER NUT

FRONT INDUCTION REAR EXHAUST (FIRE)

(ALSO INCLUDES APPLICABLE STUNT, FF, CL, AND DUCTED FAN)

TYPE	DISP	BORE	STROKE	WT**	RPM RANGE	A	B	C	D	E	F	G	H	J	K
BSE25F	.255	.709	.644	10.5	2000-20000	1.50	.590	1.22	2.10	2.156	1.61	1.27	N.A.	N.A.	1/4-28
BSE30F	.297	.766	.644	10.1	2000-20000	1.50	.590	1.22	2.10	2.156	1.61	1.27	N.A.	N.A.	1/4-28
BSE35F	.355	.787	.730	11.6	2000-20000	1.50	.590	1.22	2.10	2.156	1.61	1.27	N.A.	N.A.	1/4-28
JF40	.398	.846	.708	12.5	2000-22000	1.62	.590	1.38	2.50	2.45	1.63	1.38	N.A.	N.A.	1/4-28
JF46	.457	.880	.752	12.25	2000-22000	1.62	.590	1.38	2.53	2.45	1.63	1.38	N.A.	N.A.	1/4-28
JF50	.498	.900	.783	12.0	2000-22000	1.62	.590	1.38	2.55	2.45	1.63	1.38	N.A.	N.A.	1/4-28
JF60L	.595	.940	.865	13.0	2000-20000	1.73	.689	1.42	2.60	2.45	1.63	1.38	N.A.	N.A.	1/4-28
JF76	.754	1.039	.890	23.5	1800-16000	2.00	1.00	1.74	3.25	3.00	2.0	1.75	N.A.	N.A.	5/16-24
JF95	.954	1.125	.960	23.5	1800-16000	2.00	1.00	1.74	3.25	3.00	2.0	1.75	N.A.	N.A.	5/16-24

**ALL WEIGHTS FOR FIRE ENGINES ARE IN OUNCES AND INCLUDE SPINNER NUT, BUT NO MUFFLER OR TUNED PIPE

If you can not find the information you are searching for, please email us at
jettengr@sbcglobal.net
and we will do our best to assist you